



3,1mm ring stripnail, HDG, Sencoted

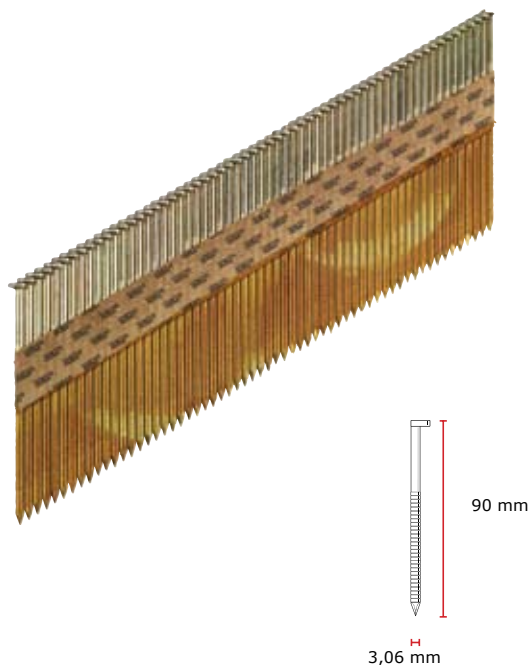

Applications

Framing, sheathing, subfloor, decks, trusses and pallets

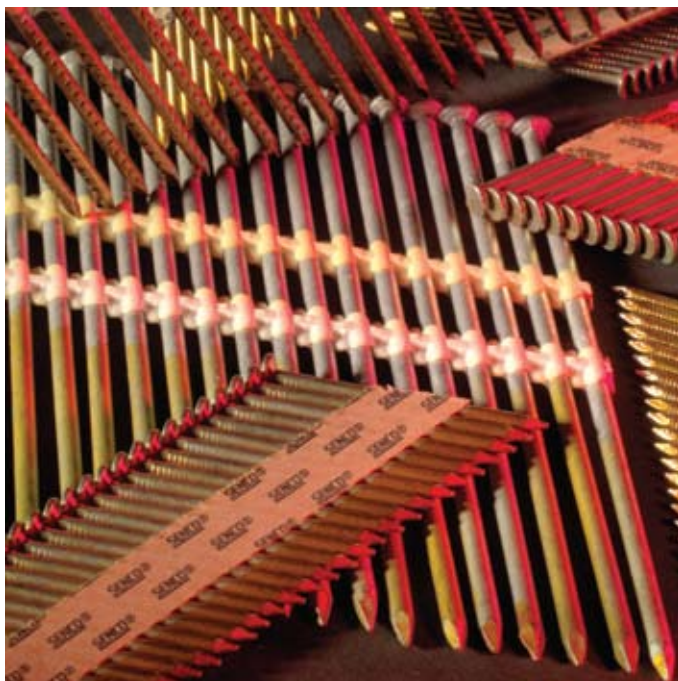

Technical specifications

Length	90 mm
Fastener head type 1	Clipped head
Pointangle (nominal)	40°
Point type	Diamond
Max. strip length	221,13 mm
Amount fasteners on strip/coil	29-31 pieces
Collation type 1	Paper collated
Collation angle	34°
Wire material	Hot-dipped galvanized corrosivity class 3
Finish	Sencoted

Advanced technical specifications

Number declaration of performance	VS-CPR-201305-S029
Characteristic yield moment	2936 Nmm
Characteristic withdrawal parameter paralel	7,6 N/mm ²
Characterist head pull through parameter	20,72 N/mm ²
Characteristic tensile strenght	633 N/mm ²
Coating lenght	60 mm
Head cross sectional area	30 mm
Lenght of threaded part	62 mm
Lenght of point	4 mm
Coating type	Coating type 3
Protection level in micron	55
CE fastener type	Round cross-section ring shank nail
Service class	3

3,1mm ring stripnail, HDG, Sencoted**Logistic specifications****Primary packaging**

Primary packaging	Box
Quantity in primary packaging	2000
GTIN (Base unit of measure)	8715274028538
Gross weight	10,86 kg